


©Kawasaki Motors Corp 1974 Printed in USA

obsolete


The following corrections should be made to the new H Series Shop Manual.

- A. Page 20, Paragraph e. The connecting rod small end play service limit should be 0.0039 in. (0.10mm).
- B. Page 28, Second Column. Line five should read: "the clutch hub. Thus, the drive train is as"
- C. Page 44. Diagram 182 should be corrected to match the following diagram:

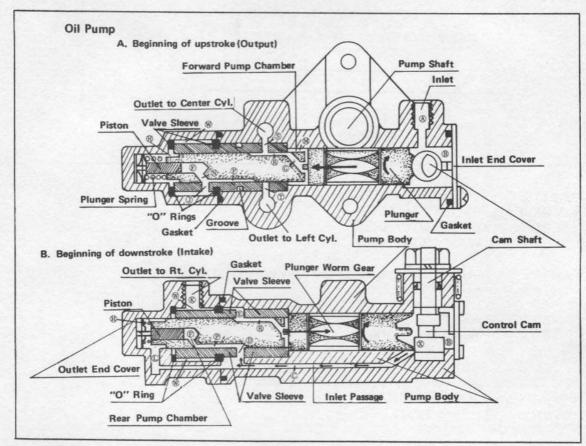

- D. Page 45, First Column. Line eleven should read: "follower coincides with the center cylinder outlet"
- E. Page 45, First Column. Line twenty-one should read: "around to the outlet K and from there to the right"
- F. Page 45, Second Column. Line twenty-eight should read: "T" to the center on left cylinder outlet."
- G. Page 45, Second Column, Line twenty-eight should read: "flows into space W to the engine right cylinder"
- H. Page 52, Table 21. H2 jet needle should be "5EJ15-3." H2 measurement "A" should be "same as H1."

- Page 65, Table 31 Spring Length:
  H2 Standard Rear Length should read "2.36 in. (60mm)"
  H2 Service Limit Rear Length should read "2.48 in. (63mm)"
- J. Page 104, Diagram #399 should be corrected to match the diagram below:

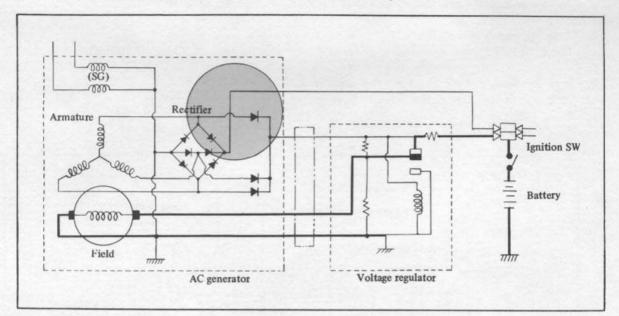

- K. Page 119, Ignition Rectifier Unit, Paragraph 1, values should read:
  - + to BK-W, to B1 R = 20 to  $35\Omega$
  - + to BK-W, to G R = 20 to  $35\Omega$
  - + to BK-W, to W R = 70 to  $250 \Omega$
- L. Page 119, Ignition Rectifier Unit, Paragraph 2, values should read:
  - to BK-W, + to LG R = 25 to 250  $\Omega$
- M. Page 120, Regulator, Paragraph 1, values should read:
  - + to BK, to Red R = 700 to  $1000 \Omega$
  - to BK, + to Red R = 70 to 200  $\Omega$
- N. Page 120, Regulator, Paragraph 2, values should read:
  - + to BK, to Y R = 1 to 1.2K $\Omega$
  - to BK, = Y R + 25 to  $100 \Omega$
- O. Page 120, Regulator, Paragraph 3, values should read:
  - + to R, to Y R = 25 to  $90 \Omega$
  - to R, + to Y

One Y lead: R = under  $2 K\Omega$ Other Y lead: R = under  $6 K\Omega$ 

- P. Page 120, Paragraph 4 should read:
  - 4. Connect the battery voltage indicated to the Black lead and + to the Red lead. Then measure resistance between the two Yellow leads.

Figure 440 – R = infinity (no reading) with test leads reversed, R =  $500\Omega$ 

Figure 441 — R = infinity (no reading) ■